

NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

Page 1

Atty. Docket No. 04756.00006

Assistant Commissioner of Patents
Box Patent Applications
Washington, D.C. 20231

Enclosed herewith is a new patent application and the following papers:

First Named Inventor (or application identifier): Edward J. DALGEWICZ, III

Title of Invention: MULTI-LAYERED THERMOPLASTIC CONTAINER

1. ☒ Specification 30 pages (including specification, claims, abstract) / 77 claims (9 independent)
2. ☒ Declaration/Power of Attorney is:
☐ attached in the regular manner.
☒ NOT included, but deferred under 37 C.F.R. § 1.53(f).
3. ☒ Formal Drawings: 2 distinct sheets/4 Figures.
4. ☐ Preliminary Amendment.
5. ☐ Information Disclosure Statement
☐ Form 1449
☐ A copy of each cited prior art reference
6. ☐ Assignment with Cover Sheet.
7. ☐ Priority is hereby claimed under 35 U.S.C. § 119 based upon the following application(s):

Country	Application Number	Date of Filing (day, month, year)

8. ☐ Priority document(s).
9. ☒ Applicant claims Small Entity Status (see 37 C.F.R. 1.27).
10. ☐ Microfiche Computer Program (Appendix).
11. ☐ Nucleotide and/or Amino Acid Sequence Submission.
☐ Computer Readable Copy.
☐ Paper Copy (identical to computer copy).
☐ Statement verifying identity of above copies.

NEW UNITED STATES UTILITY PATENT APPLICATION

under 37 C.F.R. 1.53(b)

Page 2

Atty. Docket No. 04756.00006

12. Calculation of Fees:

FEE FOR	EXCESS CLAIMS	FEE	AMOUNT DUE
Basic Filing Fee (37 C.F.R. § 1.16(a))			\$710.00
Total Claims in Excess of 20 (37 C.F.R. § 1.16(c))	57	18.00	\$1026.00
Independent Claims in Excess of 3 (37 C.F.R. § 1.16(b))	6	80.00	\$480.00
Multiple Dependent Claims (37 C.F.R. § 1.16(d))	0	260.00	\$0.00
Subtotal - Filing Fee Due			\$2216.00
REDUCE BY (%) (\$)			
Reduction by 50%, if Small Entity (37 C.F.R. §§ 1.9, 1.27, 1.28)	0.5		\$1108.00
TOTAL FILING FEE DUE			\$1108.00
Assignment Recordation Fee (if applicable) (37 C.F.R. § 1.21(h))		40.00	\$0.00
GRAND TOTAL DUE			\$1108.00

13. PAYMENT is:

- ☐ included in the amount of the GRAND TOTAL by our enclosed check. A general authorization under 37 C.F.R. § 1.25(b), second sentence, is hereby given to credit or debit our Deposit Account No. 19-0733 for the instant filing and for any other fees during the pendency of this application under 37 C.F.R. §§ 1.16, 1.17 and 1.18.
- ☒ not included, but deferred under 37 C.F.R. § 1.53(f).

14. All correspondence for the attached application should be directed to:

Banner & Witcoff, Ltd.
1001 G Street, N.W.
Washington, D. C. 20001-4597
Telephone: (202) 508-9100
Facsimile: (202) 508-9299

15. Other: _____

Date: November 28, 2000

By: Paul M. Rivard
Paul M. Rivard
Registration No. 43,446

PMR/ms

MULTI-LAYERED THERMOPLASTIC CONTAINER

Field of the Invention

The present invention is directed to thermoplastic containers and, more particularly, to a thermoplastic container specifically adapted for packaging meat and other foodstuffs.

Background of the Invention

Cellular or foam trays currently are widely used for packaging fresh meat and other foodstuffs. Typically, meat is placed in the tray and overwrapped with a highly elastic, amorphous polymeric film. Even under refrigeration, this type of packaging provides only a limited shelf life for the foodstuffs, typically no more than about seven days. As unsold products approach the end of their shelf life, grocers often need to discount the sale price, and in many cases discard products whose shelf life has expired. The stretched lid stock also exerts stresses on the walls of the cellular or foam tray, which can result in deformation of the tray and/or delamination of the lid stock.

Another problem with currently available trays is consumer misuse. The cellular or foam trays generally are not designed for cooking and generally are not high temperature resistant. One common instance of consumer misuse involves defrosting or thawing frozen meat, while in the tray, in a microwave oven. Because the tray is not designed or intended for cooking, potentially toxic components of the tray can be liberated into the food when the tray containing the foodstuff is exposed to heat or microwave radiation.

It would be desirable to develop a container for packaging meat and other foodstuffs that provides increased shelf life. It also would be desirable to develop a tray for packaging meat that is microwave-safe. It would be particularly desirable to develop such a container that can be manufactured in a cost effective process.

Summary of the Invention

The present invention is directed to a multi-layered thermoplastic container having a first polymeric layer, a second intermediate layer, and a third polymeric layer. The container is particularly useful for packaging foodstuffs (e.g., fresh meat, fish, or vegetables, prepared or semi-prepared foods, and the like) using gas flushed sealing or modified atmosphere packaging (MAP) with highly elastic films. The polyalkylene terephthalate or naphthalate first layer provides stiffness and dimensional stability to the container, thereby avoiding deformation due to stresses, for example from the stretched lid stock. The first layer also provides excellent gas barrier properties to the container. The third polymeric layer provides markedly improved adhesion with conventional polyethylene-based lid stock. The container, as a whole, exhibits significantly improved gas barrier properties and shelf life for packaged foodstuffs.

The first polymeric layer comprises an alkylene terephthalate or naphthalate polyester, such as PET, and optionally contains recycled or reprocessed polymers.

The second intermediate or tie layer functions primarily as an adhesive and as a compatibilizer/emulsifier/surfactant (CES), and comprises a grafted or backbone co-polymer or ter-polymer of ethylene and a glycidyl acrylate, maleic anhydride, or mixture thereof, and optionally an acrylate co-monomer selected from the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof. The second layer optionally comprises a blend of the CES and a polar co-polymer of ethylene and a C₁-C₁₂ acrylate, such as methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, or a mixture thereof. Alternatively, the second layer comprises a suitable adhesive material, for example an anhydride modified polyolefin such as Bynel (duPont); and a minor amount of the CES, usually from about 1 to about 5 wt%, is blended with the polyester first layer.

The third polymeric layer comprises high density polyethylene (HDPE), low density polyethylene (LDPE), linear low density polyethylene (LLDPE), or a blend thereof. Any or all of the polyethylene materials in the third layer can be metallocene-based polyethylene. Metallocene-based polyethylene materials

generally have lower melting points and are more amorphous, which improves heat-sealing properties. The third layer usually forms the inner surface of the container, and preferably exhibits good sealing properties with lidding materials.

The container of the present invention can contain additional layers, including a multiplicity of any or all of the aforementioned layers, in any order, as well as one or more additional layers for a wide variety of purposes, including but not limited to aesthetics, color, gloss, physical or chemical compatibility with other layers, and barrier properties. There is no upper limit contemplated on the number of layers that can be present.

The multi-layered container of the present invention provides dramatically improved barrier properties, yielding increased shelf life for food products such as fresh meat, fish, and vegetables. The shelf life of foodstuffs packaged in the container can be as much as 30 days or more, as compared to about 7 days with current trays. The container of the present invention is microwave-safe, *i.e.*, will not contaminate the food upon exposure to heat or microwave radiation. In an alternative embodiment of the invention, the container, though microwave-safe, visibly distorts upon exposure to heat, for example the heat produced by food inside the container being exposed to microwave radiation, so as to provide a dramatic indicator of consumer misuse in applications where the container is not intended for cooking.

Alternatively, the materials of the container can be thermally treated to permit the container to have suitable high temperature resistance to permit use of the container in various cooking applications, such as thawing frozen foods in a microwave oven.

Brief Description of the Drawings

The present invention will now be described in more detail with reference to preferred embodiments of the invention, given only by way of example, and illustrated in the accompanying drawings in which:

Figure 1 is a top elevation view of a thermoplastic container in accordance with a preferred embodiment of the invention;

Figure 2 is a cross-sectional view taken through line 2-2 of Figure 1;

Figure 3 is a cross-sectional view taken through line 3-3 of Figure 1; and

Figure 4 is a graphical illustration of oxygen transmission rates for containers of the present invention.

Detailed Description of the Invention

The multi-layered container of the present invention comprises a first polymeric layer, and second intermediate or tie layer, and a third polymeric layer. The first layer, which usually forms the outside of the container, comprises an alkylene terephthalate or naphthalate polyester, such as polyethylene terephthalate (PET). The first layer may include, in whole or in part, virgin polymers, reprocessed or recycled polymers, post-consumer waste, and combinations thereof, any of which can be homo-polymers or co-polymers. As used herein, "reprocessed" and "recycled" each refer to materials that are unused in a given process cycle, typically the "trim" portions of the web around the article-forming portions. The reprocessed materials typically are collected, re-ground, and then mixed with virgin materials.

In many applications, it is desirable to use reprocessed materials not only for cost savings, but also to provide more favorable kinetics to selectively control the level of thermally induced crystallinity. A blend containing reprocessed materials typically exhibits a lower melting point and better thermoforming properties compared to a virgin polymer. For example, virgin and reprocessed polyesters, such as PET, can be combined at a ratio of virgin polyester to reprocessed polyester of from about 1:4 to about 4:1 by weight, more typically from about 1:2 to about 2:1. In one preferred embodiment, virgin PET and reprocessed PET are combined at a weight ratio of about 1:1.

The polyesters can be homopolymers, co-polymers, or blends thereof, and may be straight-chained, branched, or mixtures thereof. In addition, blends of polymers having varying molecular weights and/or intrinsic viscosity (I.V.) may be used. When PET is used, I.V. most often ranges from about 0.5 to 1.2. The polymers may be branched by inclusion of small quantities of trihydric or

tetrahydric alcohols, or tribasic or tetrabasic carboxylic acids, examples of which include trimellitic acid, trimethylol-ethane, trimethylol-propane, trimesic acid, pentaerythritol and mixtures thereof. The degree of branching preferably is no more than about 3%. It has been found that blends of homopolymers and copolymers often are particularly desirable to provide overall kinetics more favorable for controlling thermally induced crystallinity.

As used herein alone or as part of another group, the term "alkyl" or "alk" denotes straight and branched chain saturated hydrocarbon groups, preferably having 1 to 20 carbon atoms, more usually 1 to 6 carbon atoms. Exemplary groups include methyl, ethyl, propyl, isopropyl, n-butyl, t-butyl, isobutyl, pentyl, hexyl, isohexyl, heptyl, 4,4-dimethylpentyl, octyl, 2,2,4-trimethylpentyl, nonyl, decyl, undecyl, dodecyl, combinations thereof and the like.

The term "cycloalkyl" as used herein alone or as part of another group, denotes saturated cyclic hydrocarbon ring systems, preferably containing 1 to 3 rings and 3 to 7 carbons per ring. Exemplary groups include cyclopropyl, cyclobutyl, cyclopentyl, cyclohexyl, cycloheptyl, cyclooctyl, cyclodecyl, cyclododecyl, adamantyl and combinations thereof.

The term "alkylene" as used herein denotes divalent, unsaturated hydrocarbon groups of the overall formula $-C_nH_{2n}-$, wherein n preferably is from 1 to 10. Exemplary groups include methylene, ethylene, and propylene. Such groups represent alkyl groups as defined above from which another hydrogen has been removed.

Intrinsic viscosity (I.V.) as used herein is defined as the limit of the fraction $\ln(v)/C$ as C, the concentration of the polymer solution, approaches 0, wherein v is the relative viscosity which is measured at several different concentrations in a 60/40 mixed solvent of phenol and tetrachloroethane at 30°C. Units for I.V. are dl/g unless otherwise indicated.

The first layer can include, in whole or in part, an alkylene terephthalate or naphthalate polyester. Polyalkylene terephthalates can be prepared by the polycondensation reaction of terephthalic acid, or a lower alkyl ester thereof, and aliphatic or cycloaliphatic C_2-C_{10} diols. Such reaction products include

polyalkylene terephthalate resins, including, but not limited to, polyethylene terephthalate, polybutylene terephthalate, polytetramethylene terephthalate, and copolymers and mixtures thereof. As is known to those skilled in the art, these polyester resins may be obtained through the polycondensation reaction of terephthalic acid, or a lower alkyl ester thereof, and an alkylene diol. For example, polyethylene terephthalate can be prepared by polycondensation of dimethyl terephthalate and ethylene glycol following an ester interchange reaction. Non-limiting examples of suitable polyesters include polyethylene terephthalate (PET), polybutylene terephthalate (PBT), polyethylene naphthalate (PEN), polycyclohexanedicarboxylic acid (PCTA), polycyclohexanedicarboxylic acid (PCTA), (poly)ethylene-co-1,4-cyclohexanedimethylene terephthalate (PETG), polytrimethylene terephthalate (PTT), and co-polymers and mixtures thereof.

The polyester may contain up to about 25 mol% of other aliphatic dicarboxylic acid groups having from about 4 to about 12 carbon atoms as well as aromatic or cycloaliphatic dicarboxylic acid groups having from about 8 to about 14 carbon atoms. Non-limiting examples of these monomers include iso-phthalic acid (IPA), phthalic acid, succinic acid, adipic acid, sebacic acid, azelaic acid, cyclohexane diacetic acid, naphthalene-2,6-dicarboxylic acid, 4,4-diphenylene-dicarboxylic acid and mixtures thereof.

The polyester also may contain up to about 25 mol% of other aliphatic C₂-C₁₀ or cycloaliphatic C₆-C₂₁ diol components. Non-limiting examples include neopentyl glycol, pentane-1,5-diol, cyclohexane-1,6-diol, cyclohexane-1,4-dimethanol, 3-methyl pentane-2,4-diol, 2-methyl pentane-2,4-diol, propane-1,3-diol, 2-ethyl propane-1,2-diol, 2,2,4-trimethyl pentane-1,3-diol, 2,2,4-trimethyl pentane-1,6-diol, 2,2-dimethyl propane-1,3-diol, 2-ethyl hexane-1,3-diol, hexane-2,5-diol, 1,4-di(β -hydroxy-ethoxy)benzene, 2,2-bis-(4-hydroxypropoxy-phenyl) propane, and mixtures thereof.

Linear alkylene terephthalate or naphthalate homopolymers typically exhibit faster crystallization than do co-polymers. Branched polymers typically yield higher melt strengths. As will be appreciated by those skilled in the art, mixtures of branched- or unbranched homopolymers and/or co-polymers, optionally having

varying molecular weights and/or I.V., can be selected to obtain a polymer having the most suitable properties for a particular application. For example, in applications not requiring high temperature resistance, co-polymers are desirable for such attributes as low melting point and good barrier properties.

Polyesters having lower I.V. generally have lower molecular weights, shorter chain lengths, and exhibit faster crystallization kinetics, resulting in better heat setting properties (*e.g.*, higher dimensional stability). In addition, lower-I.V. polymers generally are less expensive, and have lower extrusion melt temperatures, resulting in less degradation, faster stress relaxation time, reduced molding time and reduced production time. Given these properties, lower I.V. polyesters often can be drawn into deeper molds even without the use of a plug assist. A preferred polyester is polyethylene terephthalate (PET) having an I.V. of less than 0.95, 0.90, 0.85, or 0.80 (available from Shell Polyester). The thickness of the first layer should be suitably selected to provide the desired level of dimensional stability and adequate barrier properties to the container. Most often, the average thickness ranges from about 5 to 35 mils, more usually from about 10 to about 20 mils, and even more usually from about 12 to about 18 mils.

The polyester may contain various impurities. Preferably, impurities that hinder crystallization are held to a minimum. Examples of such impurities include acetaldehyde, diethylene glycol, and isopropyl aldehyde, with preferred maximum concentrations of these components being 2 wt%, 2 ppm, and 5 wt%, respectively, based on the total weight of the bulk polymer. Skilled practitioners can easily identify the impurities that hinder crystallization and the concentration at which they do so. Other additives known in the art may be included in the composition up to about 30% by weight. Non-limiting examples of such additives include antioxidants, flame retardants, reinforcing agents such as glass fiber, asbestos fiber and flake, mineral fillers, stabilizers, nucleating agents, ultraviolet light stabilizers, heat and light stabilizers, lubricants, dyes, pigments, toners, mold release agents, fillers, such as glass beads and talc, and the like. Minor amounts of one or more additional polymers (*e.g.*, up to about 10 percent by weight) optionally can be incorporated, such as polyamides, polycarbonates, polyethylenes, and

polypropylenes. Antioxidants, thermal stabilizers, fillers, pigments and flame retardant additives, when used, preferably do not exert any adverse effect on impact strength.

The intermediate or tie layer primarily functions as an adhesive and as a compatibilizer/emulsifier/surfactant (CES) for the first and third layers, which in a preferred embodiment are polar and non-polar, respectively. A preferred material for the intermediate or tie layer is a grafted or backbone-based co-polymer or ter-polymer comprising ethylene and a glycidyl acrylate, such as glycidyl methacrylate, and/or maleic anhydride. The co-polymer or ter-polymer optionally includes one or more other acrylate co-monomers such as methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, *etc.* Suitable exemplary amounts of glycidyl acrylate, maleic anhydride, or mixture thereof, range from about 0.05 wt% to about 12 wt%, typically from about 0.5 wt% to about 10 wt%, and more typically from about 0.8 wt% to about 9 wt%, based on the total weight of the co-polymer or ter-polymer. A grafted co-polymer or ter-polymer typically will have less glycidyl acrylate or maleic anhydride (*e.g.*, from about 0.2 wt% to about 1.5 wt%), whereas a backbone-based co-polymer or ter-polymer can have higher amounts of glycidyl acrylate and/or maleic anhydride, *e.g.*, as indicated above. Suitable exemplary amounts of acrylate range from 0 to about 40 wt%, preferably from about 10 wt% to about 30 wt%, and even more preferably from about 20 wt% to about 35 wt %, based on the total weight of the co-polymer or ter-polymer. The melt flow index of the co-polymer or ter-polymer preferably is less than about 20, more preferably is less than about 15, and even more preferably is less than about 10 g/10 min.

In one preferred embodiment, the intermediate or tie layer comprises a ter-polymer of ethylene with about 8 wt% glycidyl methacrylate and about 25 wt% methacrylate or butylacrylate, based on the total weight of the ter-polymer. In another preferred embodiment, the intermediate or tie layer comprises a co-polymer of ethylene with about 6 wt% glycidyl methacrylate, based on the total weight of the co-polymer. In another preferred embodiment, the intermediate or tie layer comprises a ter-polymer of ethylene with about 2 wt% glycidyl

methacrylate and from about 17 to 25 wt% methacrylate, based on the total weight of the ter-polymer. In yet another preferred embodiment, the intermediate or tie layer comprises a ter-polymer of ethylene with about 3 wt% maleic anhydride and about 17 wt% butylacrylate, based on the total weight of the ter-polymer. Where the first layer includes both reprocessed and virgin polyesters, it may be advantageous to use a blend of the CES polymer families (e.g., glycidyl methacrylate- and maleic anhydride-based) to alter the mode of failure so as to improve adhesion. Under failure conditions, the tie layer generally will delaminate from the polyethylene layer when using the glycidyl methacrylate-based CES, and from the polyester layer when using the maleic anhydride-based CES.

The second layer optionally comprises a blend of the CES co-polymer or ter-polymer, as described above, and a polar co-polymer of ethylene and a C₁-C₁₂ acrylate, such as methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, or a mixture thereof. The polar co-polymer can be added, for example, to adjust rheology and/or to improve adhesion, thermal stability, compatibility, and the like. The amount of polar co-polymer used will depend on such factors as the co-monomer concentration in the CES. It has been found that improved adhesion and compatibility actually can result when a polar co-polymer is blended with a high co-monomer CES (e.g., 12 wt% of glycidyl methacrylate) at a weight ratio up to about 4:1 (polar co-polymer to CES).

The second layer typically has an average thickness of at least about 0.1 mils. There is no particular upper limit on the thickness; the practical limiting factor is cost. Most often, the average thickness ranges from about 0.1 to about 2 mils, and more usually from about 0.2 to about 1.5 mils.

The third layer comprises non-polar polyethylene. A preferred material for the third layer is high density polyethylene (HDPE) sold under the trade name Chevron 9608, which has a melt flow index of 8 and a density of 0.962. Alternatively, the third layer can comprise low density polyethylene (LDPE), linear low density polyethylene (LLDPE), or any combination of HDPE, LDPE, and LLDPE. Because LDPE generally exhibits poorer barrier properties than HDPE, it is preferred that no more than about 50 wt% LDPE is used, so as to avoid

the need for an excessively thick layer. An example of a highly branched LDPE that can be used is Chevron grade 4517, which has a density of 0.923 and a melt flow index of 5. Highly branched polymers typically exhibit improved seal strength over time, but suffer from poorer functional barrier properties. One preferred linear low density polyethylene is Linear Low Density Chevron 7325, which has a density of 0.925 and a melt flow index of 3.5. A blend of HDPE and LLDPE materials often exhibits improved compatibility with reprocessed polyesters and improved heat-setting properties. An example of a blend exhibiting improved hot tack sealing has a major portion of HDPE and from about 10-20 wt% LLDPE.

Any or all of the polyethylene materials in the third layer can include, in whole or in part, metallocene-based polyethylene. Metallocene-based polyethylene materials generally have lower melting points and are more amorphous, which improves heat-sealing properties.

The third layer typically will form the inside of a container and may be selected to provide aesthetics, color, gas barrier properties, and the like. The third layer preferably is selected to improve sealing (adhesion) properties with lidding materials to be later applied onto the container. Commonly used lid stocks include Cryovac 1050, Freshwrap and similar types sold by Cryovac and Packaging Partners. The average thickness of the third layer in the final article most often is greater than about 1 mil, typically ranges from about 1 to about 5 mils, more typically from about 2 to about 4 mils, and even more typically from about 3 to about 4 mils.

Foodstuffs can be packaged in the container using gas flushed sealing or modified atmosphere packaging (MAP). In a typical operation, oxygen (O_2), nitrogen (N_2), and optionally carbon dioxide (CO_2) are controllably flushed into a container containing a foodstuff as the highly elastic lid stock is stretched and sealed to the flange portion of the container. One of the reasons for using highly elastic materials is to avoid sagging of the lid stock due to pressure changes inside the container over time, *e.g.*, as the foodstuff absorbs carbon dioxide.

An example of a three-layered thermoplastic container comprises a first layer comprising a polyethylene terephthalate co-polymer; a second layer comprising a grafted ter-polymer of ethylene and 30 wt% methacrylate and 0.8-1.5 wt% glycidyl methacrylate or maleic anhydride, based on the total weight of the ter-polymer; and a third layer comprising a blend of HDPE and 10-20% LLDPE or Bynel E361 or 3060.

In an alternative embodiment of the present invention, the intermediate or tie layer comprises any suitable adhesive useful in adhering adjacent layers of co-extruded films. In this embodiment, a minor amount of the CES is physically blended with the polyester together with recycled or reprocessed polymers in the first layer, typically in an amount of from about 1 to about 5 wt%. Examples of materials that can be used for the intermediate or tie layer in this embodiment include chemically modified ethylene polymers, *e.g.*, co-polymers of ethylene with esters of ethylenically unsaturated carboxylic acids, such as alkyl acrylates or methacrylates, graft co-polymers of maleic acid or anhydride onto ethylene vinyl acetate copolymers, graft co-polymers of fused ring carboxylic anhydrides onto polyethylene, resin mixtures of these, and mixtures with polyethylene or co-polymers of ethylene and alpha olefin. Such materials include adhesives sold under the tradename Bynel (duPont) or Admer (Mitsui).

Figure 1 illustrates an example of a multi-layered container 1 in accordance with a preferred embodiment of the invention. The container can have any suitable length "l" and width "w," which generally are selected in accordance with the intended use of the container and consumer preferences. Often the containers have dimples, deresting lugs, or indentations 10 that permit easy stacking and unstacking of the containers. The particular shape and dimensions of the container form no part of the present invention. Figures 2 and 3 are cross-sectional views of Figure 1 taken through lines 2-2 and 3-3, respectively. Figures 2 and 3 illustrate the flange area 20 of the container that permits easy stacking and unstacking. The flange area 20 also provides a surface for adhering a lid.

Figure 4 illustrates an example of improved gas barrier properties for containers of the present invention. The three containers tested each had a surface

area of 98 in², a depth of 37mm, and a trim area of 98.5 in². In each container, reprocessed polymers were used in the first layer, which had a final composition of about 80-85 wt% HPPE, 3 wt% CES (glycidyl methacrylate-based), and the balance PET. In "Pkg. #1," the average thickness of the first (PET) layer was about 20 mils; in "Pkg. 2," 15 mils, and in "Pkg. 3," 10 mils. For each container, the average thickness of the intermediate (tie) layer was about 1 mil, and the average thickness of the third layer was about 3 mils, which had a composition of about 80 wt% HDPE and 20 wt% LLDPE. The containers were stored at 4°C and oxygen transmission (in air atmosphere, no internal pressure or vacuum) was measured.

The multi-layered container of the present invention can be made using any suitable process such as a continuous process, a discontinuous process, or a semi-continuous process. Generally, it is preferred to use a continuous process, which typically yields faster production rates and is more cost effective. A discontinuous process may be useful, for example, in the manufacture of containers having a greater area stretch ratio (*e.g.*, deep drawn parts), which often requires the use of a plug assist. A discontinuous process, which typically has lower tooling expenses, also may be more cost effective for making smaller quantities of a particular container. For the continuous process, the area stretch ratio most often ranges from about 1.25:1 to about 3:1, more usually from about 1.5:1 to about 3:1. In one preferred embodiment, the area stretch ratio is about 2:1.

The thermoplastic materials, and in particular the alkylene terephthalate or naphthalate polymer, can be subjected to thermal treatments in accordance with the intended use of the container. Preferably, the materials are heat set to provide dimensional stability, impact resistance, temperature resistance, and resistance to microwave radiation. Heat setting is a term describing the process of thermally inducing crystallization of a polyester article in a restrained position. In the practice of the invention, heat setting can be achieved by maintaining intimate contact of the thermoplastic sheet with the heated mold surface for a sufficient time to achieve a level of crystallinity that gives adequate physical properties to the finished part. A level of crystallinity above 15% is preferable for adequate

dimensional stability during demolding operations. A level above about 20% is preferable to yield parts with excellent dimensional stability and impact resistance.

The crystallinity of the polymer normally is measured by Differential Scanning Calorimetry (DSC). The terms crystallization temperature and crystallization onset are used interchangeably to mean the temperature or temperature range in which a regularly repeating morphology, brought about by a combination of molecular mobility and secondary bonding forces, is induced in a polymer over a molecular distance of at least several hundred angstroms. In PET, for example, the crystallization temperature or crystallization onset can be visually observed as the point at which a substantially amorphous, non-oriented sheet of polymer changes from a translucent, hazy appearance to a white appearance.

The term glass transition temperature (T_g) is used herein to refer to that temperature or temperature range at which a change in slope appears in the volume versus temperature curve for a polymer, and to define a temperature region below which the polymer exhibits a glassy characteristic and above which the polymer exhibits a rubbery characteristic. The glass transition temperature of polyethylene terephthalate is about 70 to 80°C.

The temperature of the mold surface should be selected in accordance with the properties of the thermoplastic materials and the desired level of crystallinity in the article. The temperature of the mold surface should be above the softening point and stretching point of the polymeric materials. Such temperatures promote stress relaxation in the thermoplastic material, which in turn eliminates or substantially eliminates post-mold distortion.

In an alternative embodiment of the invention, the thermoplastic material is subjected to a thermal treatment that is specifically designed to cause the container to become visibly distorted when the container contains foodstuffs and is exposed to microwave radiation. This can be done, for example, by molding the polyester at a lower temperature and/or by maintaining the polyester at the molding temperature for a shorter time so as to achieve no more than minimal heat setting. The distortion, for example, can alert consumers that the container is not intended for use in a microwave oven. Notwithstanding the distortion, the container

remains microwave-safe, *i.e.*, does not contaminate the food upon exposure to microwave radiation.

Alternatively, the containers can be heat set, as described, so as to provide containers specifically designed for cooking applications such as thawing frozen foods in a microwave oven, *e.g.*, without distortion. The thermoplastic materials can be subjected to thermal treatments to render the container heat resistant and suitable for various other cooking applications, as desired.

A preferred continuous apparatus for preparing the containers is described in co-pending application Serial No. 09/535,953, the disclosure of which is incorporated by reference. Given the dissimilarities in the properties of the layers (*e.g.*, melting point), three extruders typically are used for processing the first, second, and third layers, respectively. It is preferred that the co-extrudate not be stretched or oriented in either direction. In a typical continuous process, the co-extrudate, after leaving the extrusion die and optionally being fed over cooling or shaping rollers, is contacted with a rotating wheel having a plurality of mold members each having a forming cavity (female mold), which is perforated or vented so that vacuum may be drawn in the mold. The forming cavity preferably is selectively heated and/or cooled to control the rate of thermal crystallization in the article or regions thereof. The degree of crystallinity imparted to a particular region of the article is a function of not only the thermoforming temperature, but also the identity and properties of the thermoplastic material, *e.g.*, intrinsic viscosity (I.V.) and the like, and its thickness in the region.

The time that the co-extrudate remains in contact with the mold surface at the molding temperature can vary over a wide range and depends on a number of factors, such as the molding temperature, the dimensions of the mold, the number of molds, and the like. Preferably, the co-extrudate remains in the mold for a time sufficient to heat-set the article. The time at the molding temperature most often ranges from about 10-30 seconds, more usually from about 10-20 seconds.

A significant advantage of a continuous process over a discontinuous process is that the individual layers can be extruded and molded at different temperatures in accordance with their individual thermoforming properties, such as softening

and melting points. The first layer (polyester) typically is extruded at a temperature of from about 450 to 530°F (about 232 to 276°C). The intermediate or tie layer most often is extruded at a higher temperature to improve its adhesion properties, typically from about 480 to 550°F (about 249 to 288°C). The third, polyethylene layer typically is extruded at a temperature of from about 425 to about 550°F (about 218 to 288°C).

By extruding each of the layers at their individual most suitable thermoforming temperatures, surface contact between the layers is dramatically improved and the likelihood of delamination is reduced or avoided. In addition, the vacuum in the mold often is sufficient to obtain adequate contact between the layers for adhesion, without the need for a pressure box. It is desirable to avoid the use of a pressure box not only because of increased process time and expense, but also because of the problem of unwanted adhesion between the pressure box and the upper (*e.g.*, polyethylene) layer.

Preferably, the layers are co-extruded with the (thicker) first layer on top, and a reversing roll is used to invert the co-extrudate prior to being contacted with the molding surface. When female molds are used, the first layer typically contacts the mold surface.

In a typical discontinuous or semi-continuous process, the layers are co-extruded as described above and wound into rolls for storage (discontinuous) or are directly fed into a thermoformer (semi-continuous), often using pressure-assisted matched molds. An example of a discontinuous process that can be used is described in Gartland U.S. Patent 4,469,270, the disclosure of which is hereby incorporated by reference. A significant difference between a continuous process and a discontinuous or semi-continuous process is that in the latter, the sheet is heated to the thermoforming temperature while in the mold, rather than using residual heat from the extruder as in a continuous process. As a result, it is difficult to control the molding temperature of the individual layers because they are re-heated after being laminated.

While particular embodiments of the present invention have been described and illustrated, it should be understood that the invention is not limited thereto since modifications may be made by persons skilled in the art. The present application contemplates any and all modifications that fall within the spirit and scope of the underlying invention disclosed and claimed herein.

WHAT IS CLAIMED IS:

1. A multi-layered thermoplastic container comprising:
 - a first polymeric layer comprising an alkylene terephthalate or naphthalate polymer;
 - a second intermediate layer comprising a grafted or backbone co-polymer or ter-polymer of ethylene, a glycidyl acrylate, and optionally an acrylate selected from the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof; and
 - a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof.
2. The container of claim 1 wherein said first polymeric layer is selected from the group consisting of PET, PEN, PETG, PCT, PCTA, PBT, PTT, and mixtures thereof.
3. The container of claim 1 wherein said first polymeric layer comprises one or more optionally branched homo-polymers, co-polymers, reprocessed polymers, recycled polymers, or a mixture thereof.
4. The container of claim 1 wherein said second intermediate layer is selected from the group consisting of ethylene/glycidyl methacrylate co-polymer, ethylene/glycidyl methacrylate/methacrylate ter-polymer, ethylene/glycidyl methacrylate/ethylacrylate ter-polymer, ethylene/glycidyl methacrylate/butylacrylate ter-polymer, ethylene/glycidyl methacrylate/ethylhexylacrylate ter-polymer, and mixtures thereof.
5. The container of claim 4 wherein said second intermediate layer comprises a grafted co-polymer or ter-polymer.

6. The container of claim 4 wherein said second intermediate layer comprises a blend of (i) said co-polymer or ter-polymer and (ii) a co-polymer of ethylene and a C₁-C₁₂ acrylate.
7. The container of claim 1 wherein said second intermediate layer comprises a co-polymer or ter-polymer having from 0 to about 40 wt% of said acrylate and from about 0.05 to about 12 wt% of said glycidyl acrylate, based on a total weight of the co-polymer or ter-polymer.
8. The container of claim 7 wherein said second intermediate layer comprises a ter-polymer having from about 10 wt% to about 40 wt% of said acrylate.
9. The container of claim 7 wherein said co-polymer or ter-polymer has from about 0.1 wt% to about 10 wt% of said glycidyl acrylate.
10. The container of claim 1 wherein said third polymeric layer consists essentially of high density polyethylene.
11. The container of claim 1 wherein said alkylene terephthalate or naphthalate polymer has a degree of crystallinity of at least about 15%.
12. The container of claim 1 wherein said alkylene terephthalate or naphthalate polymer has a degree of crystallinity of less than about 15%.
13. A multi-layered thermoplastic container comprising:
 - a first polymeric layer comprising an alkylene terephthalate or naphthalate polymer;
 - a second intermediate layer comprising a grafted or backbone co-polymer or ter-polymer of ethylene, maleic anhydride, and optionally an acrylate selected from the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof; and

a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof.

14. The container of claim 13 wherein said first polymeric layer is selected from the group consisting of PET, PEN, PETG, PCT, PCTA, PBT, PTT, and mixtures thereof.

15. The container of claim 13 wherein said first polymeric layer comprises one or more optionally branched homo-polymers, co-polymers, reprocessed polymers, recycled polyesters, or a mixture thereof.

16. The container of claim 13 wherein said second intermediate layer is selected from the group consisting of ethylene/maleic anhydride co-polymer, ethylene/maleic anhydride/methacrylate ter-polymer, ethylene/maleic anhydride/ethylacrylate ter-polymer, ethylene/maleic anhydride/butylacrylate ter-polymer, ethylene/maleic anhydride/ethylhexylacrylate ter-polymer, and mixtures thereof.

17. The container of claim 16 wherein said second intermediate layer comprises a grafted co-polymer or ter-polymer.

18. The container of claim 16 wherein said second intermediate layer comprises a blend of (i) said co-polymer or ter-polymer and (ii) a co-polymer of ethylene and a C₁-C₁₂ acrylate.

19. The container of claim 13 wherein said second intermediate layer comprises a co-polymer or ter-polymer having from 0 to about 40 wt% of said acrylate and from about 0.05 to about 12 wt% of said maleic anhydride, based on a total weight of the co-polymer or ter-polymer.

20. The container of claim 19 wherein said second intermediate layer comprises a ter-polymer having from about 10 wt% to about 30 wt% of said acrylate.

21. The container of claim 19 wherein said co-polymer or ter-polymer has from about 0.1 wt% to about 10 wt% of said maleic anhydride.

22. A multi-layered thermoplastic container comprising:

a first polymeric layer comprising a polyethylene terephthalate homopolymer, a polyethylene terephthalate co-polymer, or a blend thereof; said first polymeric layer having an average thickness of from about 5 to about 35 mils;

a second intermediate layer comprising a grafted or backbone co-polymer or ter-polymer of ethylene, a glycidyl acrylate, and optionally an acrylate selected from the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof; said second intermediate layer having an average thickness of from about 0.1 to about 2 mils; and

a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof; said third polymeric layer having an average thickness of from about 1 to about 5 mils;

wherein said container has an area stretch ratio of from about 1.5:1 to about 3:1.

23. The container of claim 22 wherein said second intermediate layer is selected from the group consisting of ethylene/glycidyl methacrylate co-polymer, ethylene/glycidyl methacrylate/methacrylate ter-polymer, ethylene/glycidyl methacrylate/ethylacrylate ter-polymer, ethylene/glycidyl methacrylate/butylacrylate ter-polymer, ethylene/glycidyl methacrylate/ethylhexylacrylate ter-polymer, and mixtures thereof.

24. The container of claim 22 wherein said first polymeric layer comprises one or more optionally branched homo-polymers, co-polymers, reprocessed polymers, recycled polymers, or a mixture thereof.

25. The container of claim 24 wherein said first polymeric layer consists essentially of a polyethylene terephthalate co-polymer.

26. The container of claim 22 wherein said third polymeric layer consists essentially of high density polyethylene.

27. The container of claim 22 wherein said first polymeric layer has an average thickness of from about 10 to about 20 mils.

28. The container of claim 22 wherein said second intermediate layer has an average thickness of from about 0.2 to about 1.5 mils.

29. The container of claim 22 wherein said third polymeric layer has an average thickness of from about 2 to about 4 mils.

30. A multi-layered thermoplastic container comprising:

a first polymeric layer comprising a polyethylene terephthalate homopolymer, a polyethylene terephthalate co-polymer, or a blend thereof; said first polymeric layer having an average thickness of from about 5 to about 35 mils;

a second intermediate layer comprising a grafted or backbone co-polymer or ter-polymer of ethylene, maleic anhydride, and optionally an acrylate selected from the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof; said second intermediate layer having an average thickness of from about 0.1 to about 2 mils; and

a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof; said third polymeric layer having an average thickness of from about 1 to about 5 mils;

wherein said container has an area stretch ratio of from about 1.5:1 to about 3:1.

31. The container of claim 30 wherein said second intermediate layer is selected from the group consisting of ethylene/maleic anhydride co-polymer, ethylene/maleic anhydride/methacrylate ter-polymer, ethylene/maleic anhydride/ethylacrylate ter-polymer, ethylene/maleic anhydride/butylacrylate ter-polymer, ethylene/maleic anhydride/ethylhexylacrylate ter-polymer, and mixtures thereof.

32. The container of claim 30 wherein said first polymeric layer comprises one or more optionally branched homo-polymers, co-polymers, reprocessed polymers, recycled polymers, or a mixture thereof.

33. The container of claim 32 wherein said first polymeric layer consists essentially of a polyethylene terephthalate co-polymer.

34. The container of claim 30 wherein said third polymeric layer consists essentially of high density polyethylene.

35. The container of claim 30 wherein said first polymeric layer has an average thickness of from about 10 to about 20 mils.

36. The container of claim 30 wherein said second intermediate layer has an average thickness of from about 0.2 to about 1.5 mils.

37. The container of claim 30 wherein said third polymeric layer has an average thickness of from about 2 to about 4 mils.

38. A multi-layered thermoplastic container comprising:

a first polymeric layer comprising a polyethylene terephthalate homo-polymer, a polyethylene terephthalate co-polymer, or a blend thereof; said first polymeric layer having an average thickness of from about 12 to about 18 mils;

a second intermediate layer selected from the group consisting of ethylene/glycidyl methacrylate co-polymer, ethylene/maleic anhydride co-polymer,

ethylene/glycidyl methacrylate/methacrylate ter-polymer, ethylene/glycidyl methacrylate/ethylacrylate ter-polymer, ethylene/glycidyl methacrylate/butylacrylate ter-polymer, ethylene/glycidyl methacrylate/ethylhexylacrylate ter-polymer, ethylene/maleic anhydride/methacrylate ter-polymer, ethylene/maleic anhydride/ethylacrylate ter-polymer, ethylene/maleic anhydride/ butylacrylate ter-polymer, ethylene/maleic anhydride/ethylhexylacrylate ter-polymer, and mixtures thereof; said second intermediate layer having an average thickness of from about 0.1 to about 1.5 mils; and

a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof; said third polymeric layer having an average thickness of from about 2 to about 4 mils;

wherein said container has an area stretch ratio of from about 1.5:1 to about 3:1.

39. A multi-layered thermoplastic food container comprising:

a first polymeric layer comprising an alkylene terephthalate or naphthalate polymer;

a second intermediate layer comprising a grafted or backbone co-polymer or ter-polymer of ethylene, a glycidyl acrylate, and optionally an acrylate selected from the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof; and

a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof.

40. The food container of claim 39 wherein said first polymeric layer is selected from the group consisting of PET, PEN, PETG, PCT, PCTA, PBT, PTT, and mixtures thereof.

41. The food container of claim 39 wherein said first polymeric layer comprises one or more optionally branched homo-polymers, co-polymers, reprocessed polymers, recycled polymers, or a mixture thereof.

42. The food container of claim 39 wherein said second intermediate layer is selected from the group consisting of ethylene/glycidyl methacrylate co-polymer, ethylene/glycidyl methacrylate/methacrylate ter-polymer, ethylene/glycidyl methacrylate/ethylacrylate ter-polymer, ethylene/glycidyl methacrylate/butylacrylate ter-polymer, ethylene/glycidyl methacrylate/ethylhexylacrylate ter-polymer, and mixtures thereof.

43. The food container of claim 42 wherein said second intermediate layer comprises a grafted co-polymer or ter-polymer.

44. The food container of claim 42 wherein said second intermediate layer comprises a blend of (i) said co-polymer or ter-polymer and (ii) a co-polymer of ethylene and an acrylate.

45. The food container of claim 39 wherein said first polymeric layer is visibly distorted when the container is filled with food and is exposed to microwave radiation.

46. The food container of claim 39, wherein said first polymeric layer is heat set and wherein said container is suitable for cooking in a microwave oven.

47. The food container of claim 39, wherein said container contains foodstuff and is sealed with highly elastic polyethylene-based lidding stock using modified atmosphere packaging.

48. A multi-layered thermoplastic food container comprising:
a first polymeric layer comprising an alkylene terephthalate or naphthalate polymer;
a second intermediate layer comprising a grafted or backbone co-polymer or ter-polymer of ethylene, maleic anhydride, and optionally an acrylate selected from

the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof; and

a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof.

49. The food container of claim 48 wherein said first polymeric layer is selected from the group consisting of PET, PEN, PETG, PCT, PCTA, PBT, PTT, and mixtures thereof.

50. The food container of claim 48 wherein said first polymeric layer comprises one or more optionally branched homo-polymers, co-polymers, reprocessed polymers, recycled polymers, or a mixture thereof.

51. The food container of claim 48 wherein said second intermediate layer is selected from the group consisting of ethylene/maleic anhydride co-polymer, ethylene/maleic anhydride/methacrylate ter-polymer, ethylene/maleic anhydride/ethylacrylate ter-polymer, ethylene/maleic anhydride/butylacrylate ter-polymer, ethylene/maleic anhydride/ethylhexylacrylate ter-polymer, and mixtures thereof.

52. The food container of claim 48 wherein said second intermediate layer comprises a grafted co-polymer or ter-polymer.

53. The food container of claim 48 wherein said second intermediate layer comprises a blend of (i) said co-polymer or ter-polymer and (ii) a co-polymer of ethylene and an acrylate.

54. The food container of claim 48 wherein said first polymeric layer is visibly distorted when the container is filled with food and is exposed to microwave radiation.

55. The food container of claim 48, wherein said first polymeric layer is heat set and wherein said container is suitable for cooking in a microwave oven.

56. The food container of claim 48, wherein said container contains foodstuff and is sealed with highly elastic polyethylene-based lidding stock using modified atmosphere packaging.

57. A multi-layered thermoplastic container comprising:

a first polymeric layer comprising a major portion of an alkylene terephthalate or naphthalate polymer and a minor portion of a compatibilizer/emulsifier/surfactant (CES) comprising a grafted or backbone co-polymer or ter-polymer of ethylene, a glycidyl acrylate, and optionally an acrylate selected from the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof;

an intermediate adhesive layer comprising modified polyethylene; and

a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof.

58. The container of claim 57 wherein said first polymeric layer comprises a polyester selected from the group consisting of PET, PEN, PETG, PCT, PCTA, PBT, PTT, and mixtures thereof.

59. The container of claim 57 wherein said first alkylene terephthalate or naphthalate polymer comprises one or more optionally branched homo-polymers, co-polymers, reprocessed polymers, recycled polymers, or a mixture thereof.

60. The container of claim 57 wherein said CES is selected from the group consisting of ethylene/glycidyl methacrylate co-polymer, ethylene/glycidyl methacrylate/methacrylate ter-polymer, ethylene/ glycidyl methacrylate/ ethylacrylate ter-polymer, ethylene/glycidyl methacrylate/ butylacrylate ter-

polymer, ethylene/glycidyl methacrylate/ ethylhexylacrylate ter-polymer, and mixtures thereof.

61. The container of claim 60 wherein said CES comprises a grafted co-polymer or ter-polymer.

62. The container of claim 59 wherein said CES comprises a co-polymer or ter-polymer having from 0 to about 40 wt% of said acrylate and from about 0.05 to about 12 wt% of said glycidyl acrylate, based on a total weight of the co-polymer or ter-polymer.

63. The container of claim 62 wherein said CES comprises a ter-polymer having from about 10 wt% to about 40 wt% of said acrylate.

64. The container of claim 62 wherein said co-polymer or ter-polymer has from about 0.1 wt% to about 10 wt% of said glycidyl acrylate.

65. The container of claim 59 wherein said third polymeric layer consists essentially of high density polyethylene.

66. The container of claim 59 wherein said alkylene terephthalate or naphthalate polymer has a degree of crystallinity of at least about 15%.

67. The container of claim 59 wherein said alkylene terephthalate or naphthalate polymer has a degree of crystallinity of less than about 15%.

68. A multi-layered thermoplastic container comprising:

a first polymeric layer comprising a major portion of an alkylene terephthalate or naphthalate polymer and a minor portion of a compatibilizer/emulsifier/surfactant (CES) comprising a grafted or backbone co-polymer or ter-polymer of ethylene, maleic anhydride, and optionally an acrylate

selected from the group consisting of methacrylate, ethylacrylate, propylacrylate, butylacrylate, ethylhexylacrylate, and mixtures thereof;

an intermediate adhesive layer comprising modified polyethylene; and

a third polymeric layer comprising high density polyethylene, low density polyethylene, linear low density polyethylene, or a blend thereof.

69. The container of claim 68 wherein said alkylene terephthalate or naphthalate polymer is selected from the group consisting of PET, PEN, PETG, PCT, PCTA, PBT, PTT, and mixtures thereof.

70. The container of claim 68 wherein said alkylene terephthalate or naphthalate polymer comprises one or more optionally branched homo-polymers, co-polymers, reprocessed polymers, recycled polyesters, or a mixture thereof.

71. The container of claim 68 wherein said CES is selected from the group consisting of ethylene/maleic anhydride co-polymer, ethylene/maleic anhydride/methacrylate ter-polymer, ethylene/maleic anhydride/ethylacrylate ter-polymer, ethylene/maleic anhydride/butylacrylate ter-polymer, ethylene/maleic anhydride/ethylhexylacrylate ter-polymer, and mixtures thereof.

72. The container of claim 71 wherein said CES comprises a grafted co-polymer or ter-polymer.

73. The container of claim 68 wherein said CES comprises a co-polymer or ter-polymer having from 0 to about 40 wt% of said acrylate and from about 0.05 to about 12 wt% of said maleic anhydride, based on a total weight of the co-polymer or ter-polymer.

74. The container of claim 73 wherein said CES comprises a ter-polymer having from about 10 wt% to about 30 wt% of said acrylate.

75. The container of claim 74 wherein said co-polymer or ter-polymer has from about 1 wt% to about 10 wt% of said maleic anhydride.

76. The container of claim 57 wherein said first layer comprises from about 1 to about 5 wt% of said CES.

77. The container of claim 68 wherein said first layer comprises from about 1 to about 5 wt% of said CES.

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
22

MULTI-LAYERED THERMOPLASTIC CONTAINER

Abstract of the Disclosure

A thermoplastic container, which is particularly useful for packaging meat, comprises a first polymeric layer, a second intermediate or tie layer, and a third polymeric layer. The first layer comprises an alkylene terephthalate or naphthalate polymer such as polyethylene terephthalate (PET). The first layer can include, in whole or in part, one or more homo-polymers, co-polymers, recycled polymers, or reprocessed polymers. The third layer comprises a non-polar thermoplastic such as high density polyethylene (HDPE), low density polyethylene (LDPE), linear low density polyethylene (LLDPE), or a blend thereof. The intermediate layer primarily functions as an adhesive and as a compatibilizer/emulsifier/surfactant (CES), and comprises a grafted or backbone-based co-polymer or ter-polymer of ethylene, glycidyl acrylate or maleic anhydride, and optionally an acrylate co-monomer.

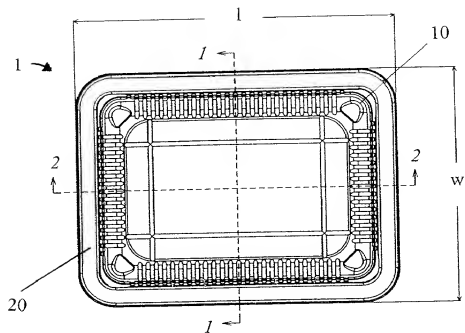


FIG. 1



FIG. 2



FIG. 3

